



# SPECIFICATIONS

ELECTRICAL CHARACTERISTICS			
Model	SPC120P		
Power at STC (Pm)	120W		
Maximum power voltage (Vpm)	17.2V		
Maximum power current (Ipm)	7.0A		
Open circuit voltage (Voc)	21.6V		
Short circuit current (Isc)	7.72A		
Tolerance	±5%		
Module efficiency	14.17%		
Standard test conditions	Temperature 25°C, Irradiance 1000W/m <sup>2</sup> , AM=1.5		
Maximum system voltage	600V DC	Series fuse rating	10A
Temperature coefficient	Isc: 0.05%/K	Voc: -0.36%/K	Pmax: -0.46%/K

Specifications	
Cell	Multicrystalline silicon solar cell, (156mmx130mm)
No. of cell and connection	36 (4x9)
Dimension	1242mm (48.9in) x 675mm (26.57in) x 35mm (1.38in)
Weight	9.0KG 20 lbs

AMBIENT CONDITIONS	
Operating Temperature	-40°C to +85°C
Storage Humidity	<90%

Output	
Type of output terminal	Junction box
Cable	MC4 style 3ft

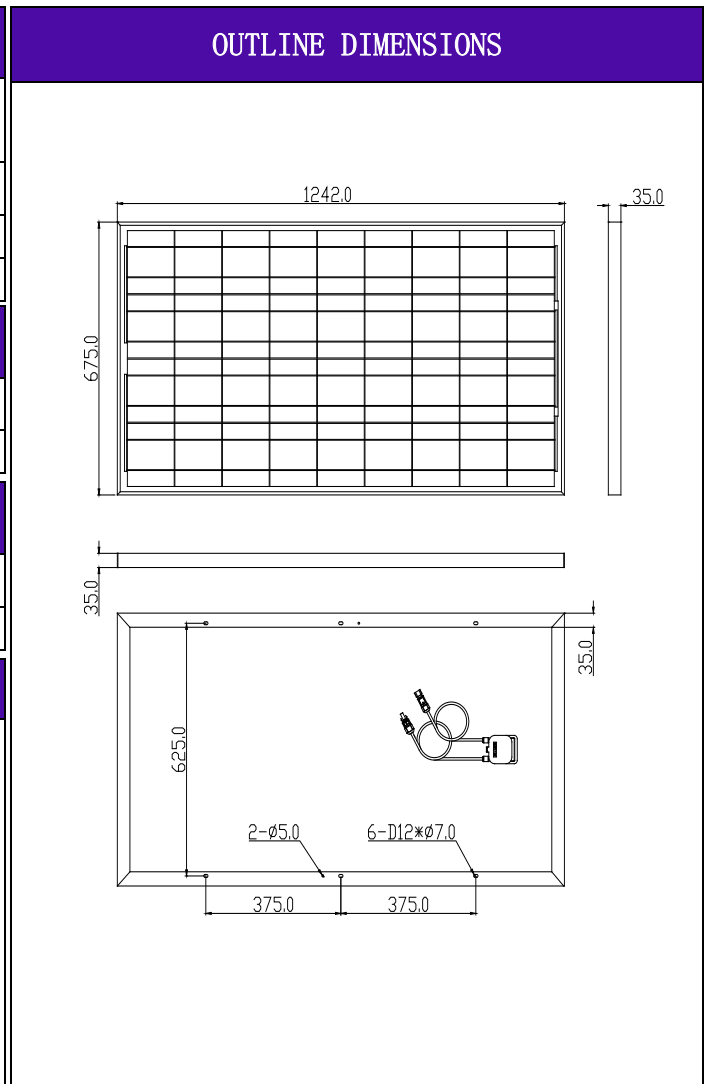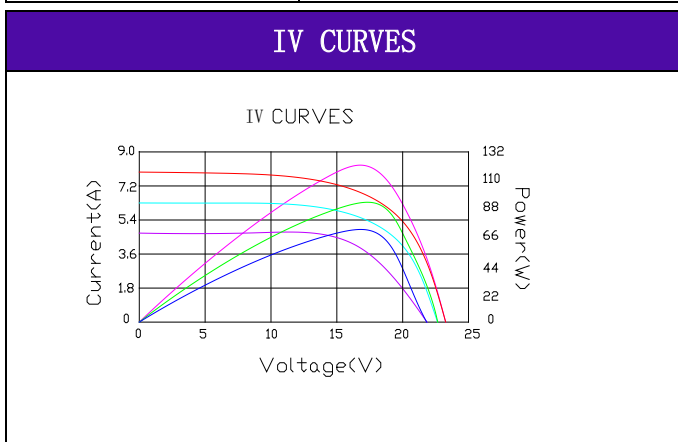

**Solartech Power, Inc.**  
 901 E CEDAR ST. ONTARIO CA 91761  
 Tel: 909-673-0178 Fax: 909-947-2919

[www.solartechpower.com](http://www.solartechpower.com)

E-mail: [sales@solartechpower.com](mailto:sales@solartechpower.com)

**Limited Warranty: 2 years workmanship, 5 years power**