

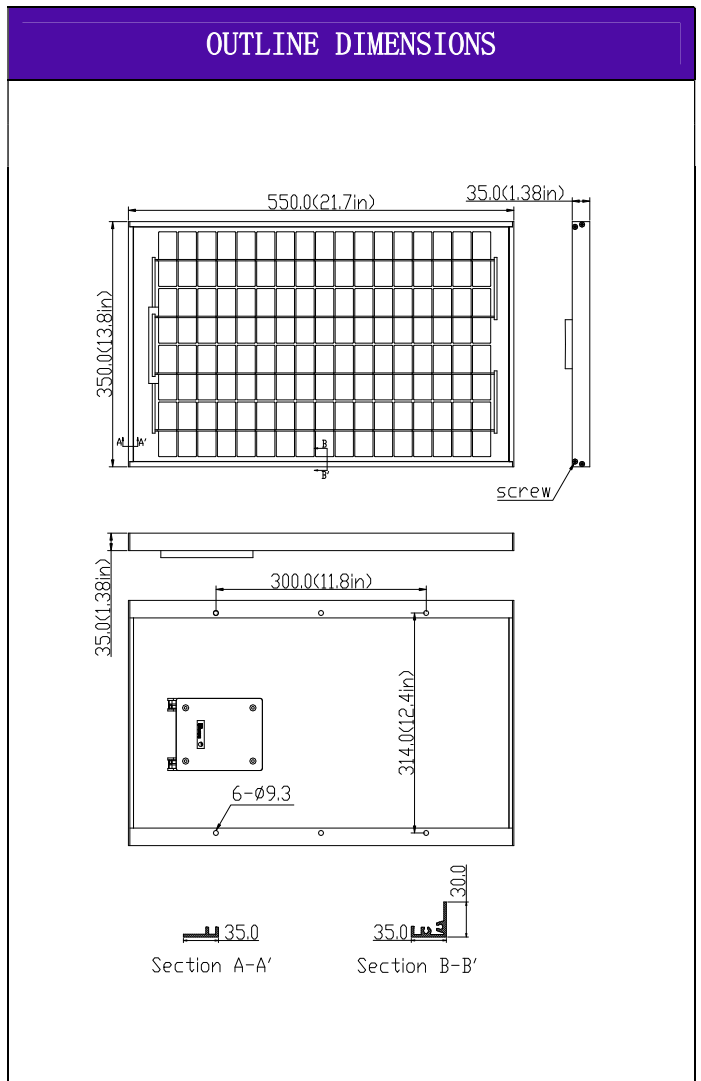
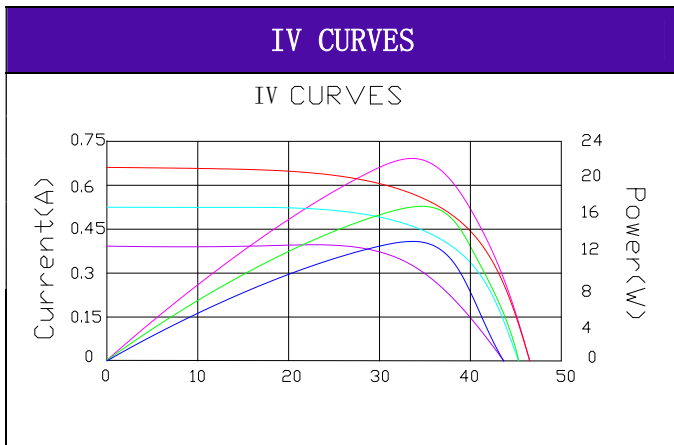

**Solartech** Power, Inc.  
**SPECIFICATIONS**

ELECTRICAL CHARACTERISTICS			
Model	SPM020P-WP-F		
Power at STC (Pm)	20W		
Maximum power voltage (Vpm)	33.9V		
Maximum power current (Ipm)	0.61A		
Open circuit voltage (Voc)	41.3V		
Short circuit current (Isc)	0.65A		
Tolerance	±5%		
Module efficiency	10.38%		
Standard test conditions	Temperature 25°C, Irradiance 1000W/m <sup>2</sup> , AM=1.5		
Maximum system voltage	600V DC	Series fuse rating	10A
Temperature coefficient	Isc:0.05%/K	Voc:-0.36%/K	Pmax:-0.46%/K

Specifications	
Cell	Multicrystalline silicon solar cell, (78mmx26mm)
No. of cell and connection	68(4x17)
Dimension	550mm(21.7in)x350mm(13.8in)x35mm(1.38in)
Weight	2.8KG

AMBIENT CONDITIONS	
Operating Temperature	-40°C to +60°C
Storage Humidity	<90%

OUT PUT	
Type of output terminal	Junction box
Cable	



UL STD NO 1703  
 ULC/ORD STD NO C1703  
 Class 1, Division 2 A, B, C and D,

**SOLARTECH POWER, INC.**  
 901 E CEDAR ST  
 ONTARIO, CA 91761 USA  
[www.solartechpower.com](http://www.solartechpower.com)  
[sales@solartechpower.com](mailto:sales@solartechpower.com)  
 TOLL: 866-777-6527  
 TEL: 909-673-0178  
 FAX: 909-947-2919