


# LR6-72PH 360~380M

**Hi-MO1 High Efficiency  
Low LID Mono PERC Technology  
(1500V Compatible)**

10-year Warranty for Materials and Processing;  
25-year Warranty for Extra Linear Power Output

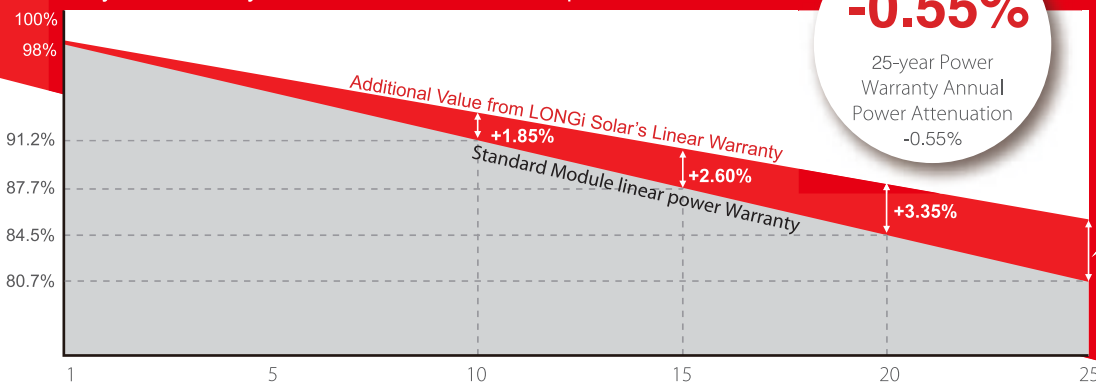

**-0.55%**

25-year Power  
Warranty Annual  
Power Attenuation  
-0.55%

**+4.10%**

## Complete System and Product Certifications

IEC 61215, IEC61730, UL1703  
ISO 9001:2008: ISO Quality Management System  
ISO 14001: 2004: ISO Environment Management System  
TS62941: Guideline for module design qualification and type approval  
OHSAS 18001: 2007 Occupational Health and Safety



\* Specifications subject to technical changes and tests. LONGi Solar reserves the right of interpretation.

**Positive power tolerance** (0 ~ +5W) guaranteed

**High module conversion efficiency** (up to 19.6%)

**Slower power degradation** enabled by Low LID Mono PERC technology: first year <2%, 0.55% year 2-25

**Better energy yield** with excellent low irradiance performance and temperature coefficient

**Solid PID resistance** ensured by solar cell process optimization and careful module BOM selection

**Adaptable to harsh environment:** passed rigorous salt mist and ammonia tests

**Robust frame** (40mm) withstands mechanical loading of 5400Pa for snow load on front and 2400Pa for wind load on rear side

# LONGi Solar

Room 201, Building 8, Sandhill Plaza, Lane 2290, Zuchongzhi Road, Pudong District, Shanghai, 201203  
Tel: + 86-21-61047332 Fax: +86-21-61047377 E-mail: module@longi-silicon.com  
Facebook: www.facebook.com/LONGi Solar


Note: Due to continuous technical innovation, R&D and improvement, technical data above mentioned may be of modification accordingly. LONGi Solar have the sole right to make such modification at anytime without further notice; Demanding party shall request for the latest datasheet for such as contract need, and make it a consisting and binding part of lawful documentation duly signed by both parties.

# LR6-72PH 360~380M

## Design (mm)

## Mechanical Parameters

## Operating Parameters

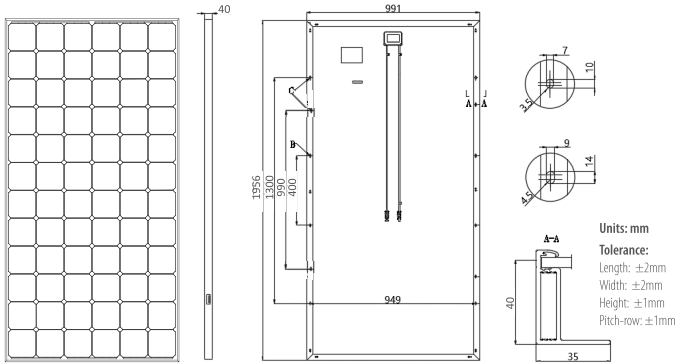

Cell Orientation: 72 (6×12)  
 Junction Box: IP67, three diodes  
 Output Cable: 4mm<sup>2</sup>, 1200mm in length  
 Glass: 3.2mm coated tempered glass  
 Weight: 22.5kg  
 Dimension: 1956×991×40mm  
 Packaging: 26pcs per pallet  
 130pcs per 20'GP  
 624pcs per 40'HC

Operational Temperature: -40 C ~ +85 C  
 Power Output Tolerance: 0 ~ +5 W  
 Maximum System Voltage: DC1500V (IEC&UL)  
 Maximum Series Fuse Rating: 20A  
 Nominal Operating Cell Temperature: 45±2 C  
 Application Class: Class II  
 Fire Rating: UL type 4

## Electrical Characteristics

Test uncertainty for Pmax: ±3%

Model Number	LR6-72PH-360M		LR6-72PH-365M		LR6-72PH-370M		LR6-72PH-375M		LR6-72PH-380M	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax/W)	360	266.7	365	270.4	370	274.1	375	277.8	380	281.5
Open Circuit Voltage (Voc/V)	47.8	44.6	48.1	44.9	48.4	45.2	48.7	45.5	49.0	45.7
Short Circuit Current (Isc/A)	9.87	7.96	9.90	7.98	9.93	8.00	9.96	8.03	10.00	8.06
Voltage at Maximum Power (Vmp/V)	39.0	36.0	39.3	36.3	39.7	36.7	40.1	37.0	40.4	37.3
Current at Maximum Power (Imp/A)	9.23	7.40	9.28	7.44	9.32	7.47	9.36	7.51	9.40	7.54
Module Efficiency(%)	18.6		18.8		19.1		19.3		19.6	

STC (Standard Testing Conditions): Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25 C, Spectra at AM1.5

NOCT (Nominal Operating Cell Temperature): Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20 C, Spectra at AM1.5, Wind at 1m/s

## Temperature Ratings ( STC )


Temperature Coefficient of Isc	+0.057%/C
Temperature Coefficient of Voc	-0.286%/C
Temperature Coefficient of Pmax	-0.370%/C

## Mechanical Loading


Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Hailstone Test	25mm Hailstone at the speed of 23m/s

## I-V Curve


Current-Voltage Curve (LR6-72PH-370M)

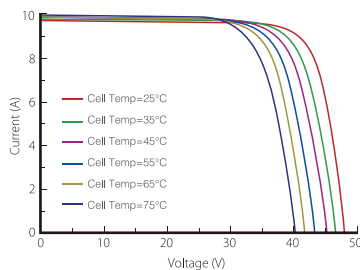

Power-Voltage Curve (LR6-72PH-370M)

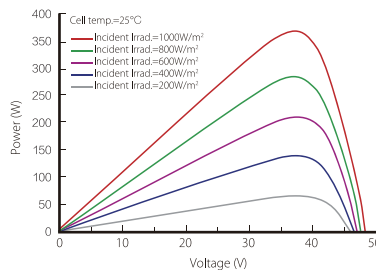

Current-Voltage Curve (LR6-72PH-370M)

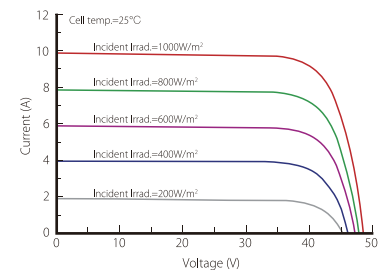

# LONGI Solar

Room 201, Building 8, Sandhill Plaza, Lane 2290, Zuchongzhi Road, Pudong District, Shanghai, 201203  
 Tel: +86-21-61047332 Fax: +86-21-61047377 E-mail: module@longi-silicon.com  
 Facebook: www.facebook.com/LONGI Solar

Note: Due to continuous technical innovation, R&D and improvement, technical data above mentioned may be of modification accordingly. LONGI Solar have the sole right to make such modification at anytime without further notice; Demanding party shall request for the latest datasheet for such as contract need, and make it a consisting and binding part of lawful documentation duly signed by both parties.