


PRE CONTROL PANEL - SOLISTO 30A

230179

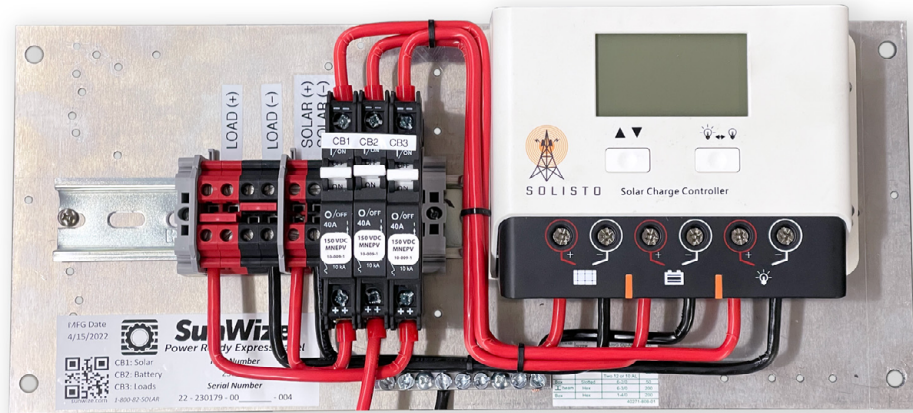

SUNWIZE POWER READY EXPRESS CONTROL PANELS ARE PREWIRED ALUMINUM PANELS, DESIGNED FOR STAND-ALONE PV SYSTEMS.

This control panel has all of the necessary switchgear to hook up the charge/load controller to a solar array, battery bank and load.

The 30A PWM controller can support solar arrays with maximum open circuit voltages up to 55V.

CONTROLLER SPECS

230179

Charge Controller Model	SOL-30-NC
Battery Voltage	12v or 24v
Max Array Voltage (Voc)	55v
Max Battery & Load Current	30A
LED Display	Yes
Lighting Control Mode	Yes
Max Battery Voltage (VDC)	34vdc

ELECTRICAL/THERMAL PARAMETERS

Operating Temperature	-25c to 55c
Battery Voltage Range	6V - 34V
Temp. Compensation	Yes

FEATURES:

- Solid state controller
- Charge controller compatible with 12V or 24V Batteries
- Pre-wired, fully assembled, QC tested
- Two (2) load connections
- Separate breakers for the array, battery, and load

CHARGE CONTROLLER FEATURES:

- 4-stage advanced charging
- Load high voltage disconnect
- Backlit LCD Screen
- Lighting Control Mode with variable run time
- USB Power Port on side (5VDC 1A output)
- Native lithium battery support
- Flooded, sealed, AGM, lithium chemistry profiles

DIMENSION AND WEIGHTS

Panel Size (LxWxH) inches	15" x 10" x 4"
Panel Size (LxWxH) mm	381 x 254 x 101.6
Weight (lb/kg)	12Lb / 5.4kg

SHOP NOW



LOCATIONS
 Oregon Warehouse
 New York Warehouse
 (866) 827-6527

